

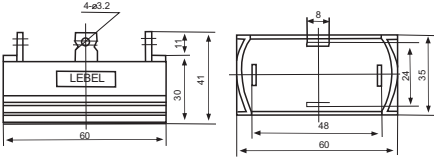
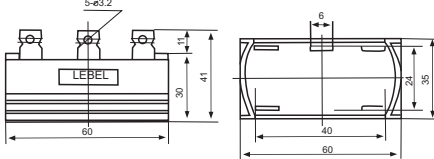








产品特征 1. 电流5-50A 2. 电压100-1600V 3. 小型通用尺寸“真空+充氩保护”焊接技术 4. 玻璃钝化二极管芯片 5. 优秀的力量/体积比率 6. 高热的传导性封装 典型应用 1. 整流电源 2. 工业自动化控制 3. 数控机床 4. 遥控系统														
型号			QL						SQL					
直流输出电流	I_d	A	10	15	20	25	35	50	10	15	20	25	35	50
输入正向平均电流	I_{FAV}	A	3.5	5	7	8.5	10	17	3.5	5	7	8.5	10	17
反向重复峰值电压	V_{RRM}	V	100-1600						100-1600					
反向重复峰值电流	I_{RRM}	mA	5						7					
绝缘电压	V_{ISOL}	V	2500						2500					
外形尺寸图			 60.0L×35.0W×41.0H						 60.0L×35.0W×41.0H					

产品特征 1. 电流10-40A 2. 电压100-1600V 3. 小型通用尺寸“真空+充氩保护”焊接技术 4. 玻璃钝化二极管芯片 5. 优秀的力量/体积比率 6. 高热的传导性封装 典型应用 1. 整流电源 2. 工业自动化控制 3. 数控机床 4. 遥控系统														
型号			4ZQ				6ZQ				ZPQ			
直流输出电流	I_d	A	10	20	30	40	10	20	30	40	10	20	30	40
正向峰值电压	V_{FM}	A	≤ 1.30				≤ 1.30				≤ 1.30			
反向重复峰值电压	V_{RRM}	V	100-1600				100-1600				100-1600			
反向重复峰值电流	I_{RRM}	mA	5				5				5			
绝缘电压	V_{ISOL}	V	2500				2500				2500			
外形尺寸图			 69.0L×49.0W×53.0H				 101.0L×57.0W×62.0H				 68.0L×50.0W×50.0H			