

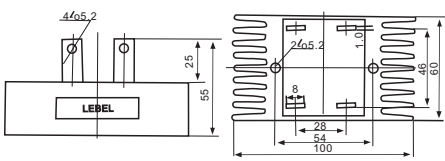
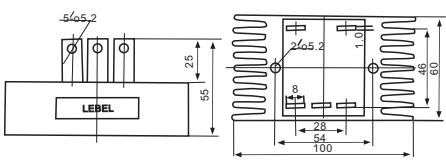


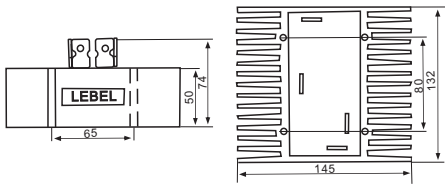
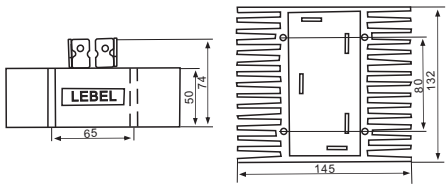


产品特征 1. 电流40-100A 2. 电压100-1600V 3. 小型通用尺寸“真空+充氩保护”焊接技术 4. 玻璃钝化二极管芯片 5. 优秀的力量/体积比率 6. 高热的传导性封装 典型应用 1. 整流电源 2. 工业自动化控制 3. 数控机械 4. 遥控系统								
型号			QL			SQL		
直流输出电流	I_d	A	40	60	100	40	60	100
输入正向平均电流	I_{FAV}	A	20	30	50	14	20	34
反向重复峰值电压	V_{RRM}	V	100-1600			100-1600		
反向重复峰值电流	I_{RRM}	mA	7			7		
绝缘电压	V_{ISOL}	V	2500			2500		
外形尺寸图			 100.0L×60.0W×55.0H			 100.0L×60.0W×55.0H		

产品特征 1. 电流100-300A 2. 电压100-1600V 3. 小型通用尺寸“真空+充氩保护”焊接技术 4. 玻璃钝化二极管芯片 5. 优秀的力量/体积比率 6. 高热的传导性封装 典型应用 1. 整流电源 2. 工业自动化控制 3. 数控机械 4. 遥控系统								
型号			QL			SQL		
直流输出电流	I_d	A	150	200	250	150	200	250
输入正向平均电流	I_{FAV}	A	75	100	125	50	67	87
反向重复峰值电压	V_{RRM}	V	100-1600			100-1600		
反向重复峰值电流	I_{RRM}	mA	10			10		
绝缘电压	V_{ISOL}	V	2500			2500		
外形尺寸图			 145.0L×132.0W×74.0H			 145.0L×132.0W×74.0H		